



ASARO KITCHEN FAUCET INSTALLATION

BEFORE YOU BEGIN

We recommend consulting a professional if you are unfamiliar with installing plumbing fixtures. Signature Hardware accepts no liability for any damage to the faucet, plumbing, sink, counter top, or for personal injury during installation.

Observe all local plumbing and building codes.

Unpack and inspect the faucet for shipping damage. If any damage is found, contact our Customer Relations team at 1-866-855-2284.

GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.
- For these instructions, it is assumed that the old faucet has been completely removed and any necessary repairs or modifications to the water supply have been completed.

TOOLS AND MATERIALS:



Plumbers
Tape



Thread
Sealant



Phillips
Screwdriver



Adjustable
Wrench



Small
Bucket



Basin
Wrench




ASARO KITCHEN FAUCET INSTALLATION


Installation

1. Ensure that the water supply below your sink is completely shut off by turning the shutoff valves all the way to the right.

Tip: Place a small bucket below your workspace to catch any water that may drip during the installation process.




2. Attach the provided braided water lines to the faucet body. Use the red and blue temperature indicator on the handle as a reference, and match the hoses accordingly. Apply a small amount of thread sealant to the threading on the hoses before attaching.

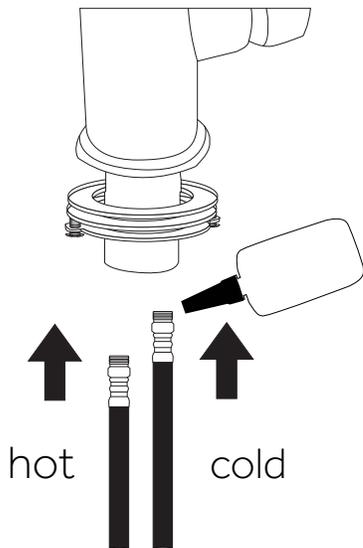


3. Remove the lock nut, metal washer, and rubber gasket from the faucet body. Insert the faucet body through the mounting hole in your counter top. Position the faucet so that the handle is on the left, as shown.

Note: If you prefer the handle to be on the right side, you may reverse the installation. Be aware that this will also reverse the handle's temperature control.

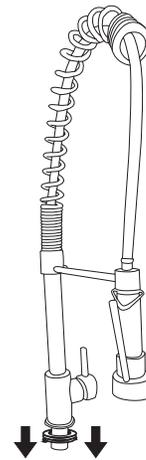


4. From beneath the sink, slide the rubber gasket back onto the faucet body followed by the metal washer. Thread the locknut back onto the faucet body using a basin wrench. Finish securing by tightening the two screws attached to the lock nut with a Phillip's screwdriver.

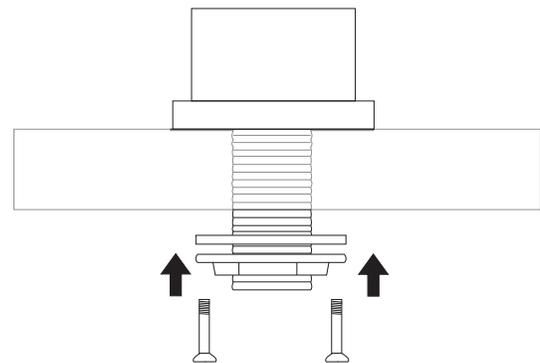



ASARO KITCHEN FAUCET INSTALLATION

5. Apply plumber's tape or thread sealant to the threading on each of the faucet's water lines, and connect the main water hoses to the faucet. Ensure that you are connecting the hot and cold lines appropriately.

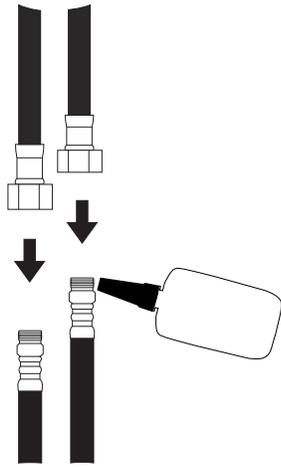

6. Once installation is complete, turn the main water supply back on from underneath your sink. Check for any leaks underneath.



7. Remove the hand sprayer by unthreading it from the sprayer hose. Turn the faucet on for approximately 60 seconds to remove any dust or loose sediment from the water lines, and to ensure that there are no leaks. Check to ensure that both hot and cold water are running properly. Reattach the sprayer and turn it on. Allow the sprayer to run for another 60 seconds, and check for any leaks.

