

TWIN

CONTROL UTILITY SHOWER SET - CHROME SKU: 131523

BEFORE YOU BEGIN

Before installing, read entire outdoor shower installation Instructions. Observe all local building and safety codes.

For the following installation instructions it is assumed that the water supply has been installed in the desired location and is accessible for shower installation.

Unpack and inspect the product for any shipping damages. If you find damages, do not install. Contact Customer Service at 1.866.855.2284. If you need assistance or have questions while installing your shower panel, contact Customer Service.

We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures. Signature Hardware accepts no liability for any damage to the seat or wall, or for personal injury during installation.

Note: Make sure to winterize your outdoor shower before cold weather arrives to prevent burst pipes and protect the shower's hardware.


GETTING STARTED

- Ensure that you have gathered all the required materials that are needed for the installation.
- For these instructions, it is assumed that the old faucet has been completely removed and any necessary repairs or modifications to the water supply have been completed.

TOOLS AND MATERIALS:



Adjustable
Wrench




Mounting
Hardware



Pencil



Drill



Air Compressor

REVISED 07/10/2019

INSTALLATION


1. Slide the soap dish onto the riser pipe and hold in place.
2. Assemble the shower by attaching the riser to the hot and cold handle valve.
3. Thread the shower head onto the top of the riser. Make sure that the rubber washer is placed between the shower head and pipe to ensure a leak free connection.
4. Hold the shower in the desired mounting location. Mark the location of the mounting holes on the handle valve and soap dish.
5. Attach the shower to the mounting surface with the appropriate mounting hardware.
6. Connect the water supply to the outlets on the handle valve body.
7. Turn on the water supply to check for leaks. Let the water flow through the shower head for approximately 30 seconds to clear out debris and dirt. If leakage occurs, tighten connections with your adjustable wrench as necessary. If problems persist, contact Customer Service at 1-866-855-2284.

TWIN

CONTROL UTILITY SHOWER SET - CHROME
SKU: 131523

WINTERIZING

1. Locate the shutoff valves for the faucet unit. Turn off the water supply.
2. Disconnect the supply lines from the faucet unit using the adjustable wrench.
3. Remove the faucet head if possible.
4. Open the valve to the HOT position.
5. Insert the air blower from the air compressor into the HOT inlet. Blow compressed air into the inlet until no more water comes out of the faucet.

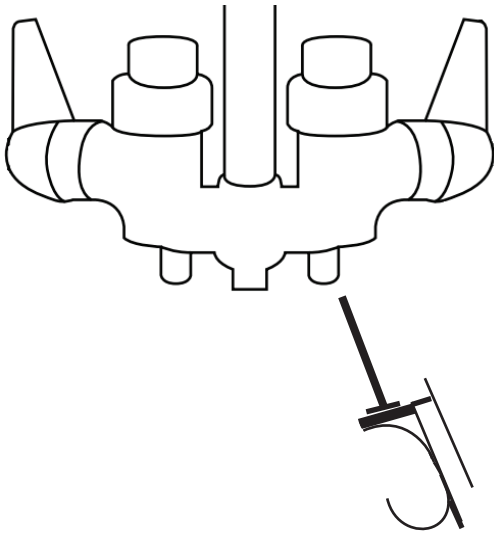

6. Open the valve to the COLD position.
7. Insert the air blower from the air compressor into the COLD inlet. Blow compressed air into the inlet until no more water comes out of the faucet.
8. As a final check, place the temperature selector in the middle range.
9. Insert the air blower tool from the air compressor into the COLD inlet. Blow compressed air into the inlet until no more water comes out of the faucet. Repeat for the HOT inlet.

When no more water comes out of the faucet, winterizing is complete.

10. Replace faucet head if previously removed.